

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : C09J 7/02, 11/00, C08K 5/5399	A1	(11) International Publication Number: WO 95/32257 (43) International Publication Date: 30 November 1995 (30.11.95)
(21) International Application Number: PCT/US95/06388 (22) International Filing Date: 19 May 1995 (19.05.95) (30) Priority Data: 9410444.5 25 May 1994 (25.05.94) GB (71) Applicant (for all designated States except US): MINNESOTA MINING AND MANUFACTURING COMPANY [US/US]; 3M Center, P.O. Box 33427, Saint Paul, MN 55133-3427 (US). (72) Inventors; and (75) Inventors/Applicants (for US only): PARSONS, Keith, P. [GB/GB]; 7 East Road, Bishops Stortford, Herts CM23 5JG (GB). BUCKINGHAM, Mark, R. [GB/GB]; 43 Granta Road, Sawston, Cambridge CB2 4HT (GB). DIAMOND, James, H. [US/US]; 5904 Highland Hills Terrace, Austin, TX 78731 (US). ILKKA, Steven, J. [US/US]; 2721 Hilo Avenue North, Oakdale, MN 55128 (US). NOWAK, Petra [DE/DE]; Beggendorfer Strasse 42, D-52531 Ubach-Palenberg (DE). (74) Agents: NEAVEILL, Daria, P. et al.; Minnesota Mining and Manufacturing Company, Office of Intellectual Property Counsel, P.O. Box 33427, Saint Paul, MN 55133-3427 (US).	(81) Designated States: JP, US, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>	
(54) Title: FLAME RETARDANT PRESSURE-SENSITIVE ADHESIVES AND TAPES (57) Abstract A pressure-sensitive adhesive composition containing an adhesive selected from rubber based compositions, acrylic adhesive compositions, adhesive foams and the like, and a flame retardant includes at least one non-halogen intumescent flame retardant, but may use combinations of NHIFR and halogenated flame retardant additives.		

90006087 "012302

BI 001005

00006087 012302

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

BI 001006

FLAME RETARDANT PRESSURE-SENSITIVE
ADHESIVES AND TAPES

5 This invention relates to pressure-sensitive adhesive compositions containing non-halogen intumescent flame retardant (NHIFR) additives and to flame retardant pressure-sensitive adhesive tapes.

10 Pressure-sensitive adhesives find use in a wide variety of applications, such as the automotive, aerospace, construction and electrical markets, either in the form of tapes or as adhesive coatings on other backings. For many of these applications, good flame retardant properties are of considerable importance. This performance has generally been achieved by means of the incorporation of halogenated, often brominated flame
15 retardant additives into the adhesive formulation, as disclosed for example, in U.S. 4,061,826. Although efficient as flame retardants, these types of materials have considerable drawbacks in terms of smoke production and toxicity concerns, relating both to combustion products and also to disposal of the compounds
20 themselves. Hence, there is considerable momentum towards the reduction in use or replacement of these flame retardants by zero halogen alternatives.

25 A further limitation of the use of halogenated flame retardants in pressure-sensitive adhesives is that during combustion they emit larger amounts of corrosive smoke. Combustion products of halogen containing materials, in particular HCl and HBr, contribute significantly to these effects. The corrosivity of smoke is of particular
30 importance in electrical/electronic applications, since a small fire involving halogenated insulation materials may generate sufficient corrosive combustion products to cause widespread damage to other equipment not directly involved in the fire.

35 It has been suggested there is a synergistic interaction between phosphorus based and halogenated

-2-

flame retardant additives. However, a detailed review on this subject (Weil, Ph.D., in Flame retardancy of polymeric materials, eds. W.C. Kuryla and A.J. Papa, pp. 185ff, Marcel Dekker, New York, 1975) concludes that the
5 evidence for phosphorus halogen synergism is too weak to call for any explanation.

NHIFR materials have been used in adhesives, but the majority of the systems disclosed do not comprise pressure-sensitive adhesives.

10 Known adhesives having flame retardants are commonly based upon epoxy resins e.g. JP 70108692 (Nitto Koseki KK) which describes the use of nitrogen containing phosphates such as melamine phosphate in epoxy adhesives, or polyurethanes e.g. U.S. 5,010,113 (Blount) which
15 describes the use of urea-phosphoric acid salts as flame retardants for flexible polyurethane foams, with adhesives as one suggested application.

U.S. 4,496,685 (Sumitomo Chemical KK) discloses the use of a variety of phosphazenes in cyanoacrylate
20 adhesives. Although flame retardant behavior is mentioned as an issue, the main focus of the disclosure is directed towards the stabilization properties of the phosphazenes resulting in improved storage stability of the resins.

25 SU 789556 (Channova) describes fire resistant adhesives consisting of butyl acrylate methacrylic acid copolymers with a mixture of borax, boric acid and ammonium phosphate as the fire retardant. However, the adhesives are not pressure-sensitive adhesives.

30 The prior-art does not disclose flame retardant pressure-sensitive adhesive compositions.

According to one aspect of the present invention there is provided a pressure-sensitive adhesive

50006087 012302

BI 001008

composition containing a non-halogen intumescent flame retardant.

The pressure-sensitive adhesive compositions may be based on a wide variety of adhesives including rubber based compositions, acrylic adhesive compositions and adhesive foams. The adhesive compositions have a wide variety of applications and are particularly suitable for use in the preparation of adhesive tapes:

The compositions of the invention possess an excellent combination of flame retardant and adhesive characteristics. In the case where solely NHIFR additives are used, reductions in smoke emission, and also in combustion toxicity and corrosivity, representing improvements upon the art are conferred by a completely non-halogen composition. However, other flame retardants may be present and in the case where combinations of NHIFR and halogenated flame retardant additives are used together, a synergistic effect is seen in flammability performance in rubber based compositions, with a surprising reduction in the tendency to produce burning drips during combustion. In addition, such combinations permit a reduction in the loading of halogenated flame retardant additive.

In one embodiment, the flame retardant is one or more NHIFR materials. Such materials normally contain up to three components: a carbonific, an acid forming catalyst, and a blowing agent. These three functions may be contained in only one or two chemicals. Such materials usually contain phosphorus compounds, and often also contain compounds of nitrogen, and are known as P/N flame retardants.

In another embodiment, a blend of at least two flame retardant additives are used, with a combination of a

00006087 012300

NHIFR material with a halogenated, for example, a brominated additive.

A wide variety of non-halogen phosphorus/nitrogen flame retardants are useful in the invention.

5 Suitable flame retardants disclosed in EP 0115871 comprise a nitrogen containing oligomer and ammonium polyphosphate. An example is commercially available under the trade name SPINFLAM MF82.

10 Other suitable flame retardants, which are available under the trade name EXOLIT IFR-10 and EXOLIT IFR-23, comprise ammonium polyphosphate in admixture with a variety of other flame retardant synergists and co-agents, fillers and pigments.

15 Other suitable flame retardants are disclosed in EP 0204027 and comprise mixtures of ammonium polyphosphate, melamine cyanurate and a hydroxyalkyl derivative of isocyanuric acid, at least partially in the form of a homopolymer. Examples of these materials are commercially available under the trade name MASTERFLAM.

20 Other suitable flame retardants are disclosed in EP 0413613A and comprise oligomeric phosphorus/nitrogen flame retardants containing a triazine nucleus, used in conjunction with ammonium polyphosphate.

25 Other suitable flame retardants are disclosed in British Patent Application No. 9208926.7 and comprise a polyphosphonamide derivative used in conjunction with ammonium polyphosphate.

Another useful class are the phosphate salts of polyols such as pentaerythritol e.g. Great Lakes CN1197.

30 A useful class of halogenated flame retardants for use in combination with NHIFR materials are the halogenated polynuclear aromatic ethers, for example, decabromodiphenyl oxide (DBDPO).

BI 001010

-3-

The flame retardants are generally employed in amounts in the range 10 to 100 parts by weight, preferably 25 to 75 parts by weight per 100 parts by weight of the pressure-sensitive adhesive. In some cases, particularly when large amounts of flame retardant are employed, there will be a reduction in the tackiness of the adhesive composition. This problem may readily be overcome by overcoating such an adhesive composition with a thin layer e.g. 125 microns or less, preferably 5 to 10 microns, of adhesive containing no flame retardant additive or a low level of flame retardant additive which does not inhibit the tackiness of the adhesive. The overall two layer combination displays good tack and adhesive properties and surprisingly the presence of the top coat does not detract from the flame retardant performance.

The flame retardant(s) may be incorporated in the adhesive by conventional techniques such as ball-milling, and thereafter the pressure-sensitive adhesive composition may be applied to a substrate in order to confer adhesive properties thereon. The substrate may comprise a wide variety of materials such as plastics (including plastic films), paper, metal, wood, glass, cloth, etc. The substrate may have release properties (e.g. silicone coated paper on film) such that the adhesive may be transferred to a second substrate by a process of lamination followed by peeling of the first substrate. Depending on the size, shape and flexibility of the substrate, the adhesive composition may be applied by any conventional technique such as brushing, dipping, spraying etc., but most commonly the substrate is in the form of a flexible continuous web and the adhesive is applied by a method such as knife-coating, roller coating, extrusion, lamination, etc. The adhesive may be

BI 001011

applied as a solution in organic solvent, as an aqueous emulsion or as a 100% solids formulation as appropriate.

The adhesive layer may be crosslinked subsequent to application to the backing, e.g. by UV or e-beam curing, in order to modify its adhesive properties, in accordance with known techniques. Coated webs may be slit into narrow strips to form tapes, or otherwise converted into articles of the required dimensions.

A pressure-sensitive adhesive tape using the adhesive of the invention may incorporate a variety of tape backings. For a particularly flame resistant tape, the backing may be glass cloth. Other useful backings include films of polyethylene terephthalate (PET), polyimide and polyolefin copolymers. The adhesive composition can be applied to the backing from solution, by hot melt coating, extrusion, or lamination of a preformed film from a release liner, in a variety of thicknesses ranging from a few microns to several millimeters, sufficient to provide the desired adhesion and other properties. Generally thin layer adhesives refer to those of about 125 microns or less. Foam adhesives are generally in the range 0.1 to 2.5 mm. The backing may be coated with the adhesive in the form of a continuous web which is then slit in the longitudinal direction to form tapes of the desired width.

Tapes in accordance with the invention may be suitable for electrical, industrial, transportation, military and electronic applications. The tapes may be in a variety of forms e.g. simple coated substrate, double-sided, etc.

The compositions of the invention may comprise any pressure-sensitive adhesive.

In one embodiment the base pressure-sensitive adhesive material of a composition of the invention can

202210 28090005

be selected from a wide variety of rubber resin based materials. These comprise an elastomeric ingredient such as crude natural rubber, styrene-butadiene elastomer, polybutadiene, polyisobutylene and polysiloxane, and a
5 tackifying resin such as glyceryl esters of hydrogenated resin, thermoplastic terpene resins, petroleum hydrocarbon resins, coumarone-indene resin, synthetic phenol resins, low molecular weight polybutenes and
10 tackifying silicone resins. Some elastomers may be at least partially self tackified, as when low molecular weight fractions tackify the high molecular weight fractions of the elastomer. Generally a tackifying resin is included in a proportion of 40 parts to 150 parts per
15 100 parts of base elastomer. Tapes using such adhesive compositions generally comprise a suitable backing coated with an approximately 1 mil thick layer of rubber resin adhesive containing up to 60% by weight of one or more flame retardant materials, and optionally contain pigments, fillers and/or tackifying agents.

20 The overall composition displays good flammability properties, as exemplified by performance in the UL510 flammability test, good adhesive characteristics and low smoke and toxic gas production upon combustion.

In a second embodiment, the base pressure-sensitive
25 adhesive is an acrylic adhesive. The acrylic pressure-sensitive adhesive material used in the invention can be selected from a wide variety of polymers and copolymers derived from acrylic and/or methacrylic acid, or ester, amide and nitrile derivatives thereof. Mixtures of
30 different polymers and copolymers can be used. The polymers and copolymers preferably are of low T_g (e.g. $< 0^\circ\text{C}$) so that the mass of polymer is tacky at ambient temperatures, and no additional tackifying resin is required. Examples of useful acrylate based materials

include homopolymers and copolymers of acrylic acid, methacrylic acid, isooctyl acrylate, acrylamide, methacrylamide, acrylonitrile, methacrylonitrile, methyl isoamyl acrylate, 2-ethyl hexylacrylate, and butyl

5 acrylate.

For certain applications, particularly application to rough surfaces, it is necessary for the adhesive layer to be relatively thick, e.g. 0.2 to 2.5 mm. Such thick coatings of adhesive tend to be difficult and expensive to manufacture by traditional adhesive coating formulations and so called "foam" pressure-sensitive adhesives have been developed. Such adhesives may be in the form of the foam having open or closed cells throughout the adhesive generated by frothing or a cellular structure may be achieved by the incorporation of hollow microspheres e.g. glass or polymeric microbubbles, into the adhesive formulation e.g. to occupy 20 to 65% of the volume of the adhesive. Examples of foam adhesives are disclosed in U.S. 4,223,067, U.S. 4,415,615 and EP 257984.

The pressure-sensitive adhesive materials, particularly acrylate based materials, may also include glass bubbles, typically at levels up to 10 parts per 100 parts of acrylate material. They may also include ultra violet curing agents such as Irgacure 651 (Ciba Geigy), typically at levels of up to 1 part per 100 parts of acrylate material to enable partial crosslinking to be accomplished by means of exposure to a UV source.

A typical foam tape of this invention consists of an acrylic adhesive foam, of thickness approximated 1 mm, containing up to 60% by weight of a phosphorus/nitrogen flame retardant, glass microspheres and other co-agents and optionally cured by ultraviolet light. The overall composition displays good flammability properties and low

-9-

smoke and toxic gas production as exemplified by cone calorimeter performance. The acrylic adhesive foam may be self-supporting, supported by a release liner or may be bonded to a backing.

5 A useful test for determining the flammability properties of adhesive tape compositions of this invention is the UL510 tape flammability test. In order to pass this test, burn times of less than 60 s must be observed following each of five successive 15 s Bunsen
10 applications to a vertical tape wrapped steel rod. In addition there must be no emission of flaming drips and the length of burnt material must not extend to a paper flag placed 10 inches above the point of impact of the Bunsen flame.

15 A further useful method for classifying the flammability properties of the materials of this invention is evaluation on the cone calorimeter. This instrument is described in detail in "The cone calorimeter - a new tool for fire safety engineering",
20 ASTM Standardization News, 18, 32-5, January 1990, and in ASTM test method E1354-90. Adhesive tape compositions were evaluated using a cone calorimeter at an external irradiant flux of 50 kW m⁻² and an exposed specimen surface area of 10 cm². In addition to flammability data
25 such as rate of heat release, cone calorimeter evaluation yields data describing the smoke and toxic gas production behavior of materials.

A useful method for flammability performance assessment is the Underwriters Laboratories UL94 test.
30 This is a widely accepted test method and is commonly used by suppliers of flame retardants and flame retardant materials. In this test a vertically clamped specimen is ignited by a specified flame from a Bunsen burner. For good performance in the test the specimen must self

BI 001015

-10-

extinguish satisfactorily and not emit any flaming drips. UL94 defines the specimen size as 12.7 cm (5 inches) long and 1.27 cm (1/2 inch) wide. UL94 performance is thickness dependent and is quoted here for specimens of thickness 1 mm.

Adhesive performance can be measured in a number of ways. One method used herein (Examples 16 and 20) was a rolling tube test, similar in form, although not corresponding to, the rolling ball tack test ASTM D 3121.

In this test a tube of diameter 1.3 inches (3.3 cm) and mass 138 g was released from a point 6 inches (15 cm) up a slope inclined at 10° to the horizontal. The lower end of the inclined slope impinged upon the surface of the specimen. When the tube was released, the distance it traveled along the specimen surface from the lower end of the incline before coming to rest was measured. Lower values in this test indicate better adhesive performance.

The ASTM D3121 rolling ball tack test was used in Example 5.

The invention will now be illustrated by the following Examples.

The following general adhesive formulation was used in Examples 1 to 12 and batch sizes of 10 g or 20 g rubber were normally employed.

BI 001016

Table 1
General rubber adhesive formulation

Ingredient	Parts (phr)
Natural rubber smoked sheet, Goodyear	100
Piccolyte S115 Tackifier, Hercules	62
Zirex (zinc resinate), Reichhol Chem	6
UCAR CK 1634 Phenolic Resin, Union Carbide	12
Irganox 1010 antioxidant, Ciba Geigy	1
Titanox 2020 TiO ₂ pigment, NL Industries	0 or 16
Flame retardants	50 to 100
Toluene	1200 ml per 100 g rubber

5 All the above ingredients were ball milled for at least 2 hours until well dispersed and then knife edge coated onto 1.2 mil (30 μ m) PET film (1.0 mil (25 μ m) film was used in Examples 8 to 12). Wet coating thicknesses of approximately ten times the final required adhesive layer thickness were used.

10 The coatings were dried in an oven at approximately 85°C for at least 10 minutes and then covered with silicone lining paper for storage. Samples were cut into 3/4" (19 mm) wide strips and wrapped onto steel rods for UL510 flammability testing. All specimens tested in

15 Examples 1 to 4 passed the US510 test. Neither flaming drips nor burnt paper flags were observed in any of the tests described in Examples 1 to 4.

BI 001017

-12-

Example 1Adhesive tape formulations containing
SPINFLAM MF82/PP as a flame retardant

In this Example, a sample of SPINFLAM MF82/PP flame
5 retardant (Montefluos), supplied with mean particle size
approximately 40 microns, was jet milled to reduce its
particles size to around 5 microns. It was found that
this milling was required in order to produce a smooth
adhesive layer with no visible particles. In general,
10 for the 25 micron (1 mil) adhesive layer thickness used
here, a particle size of approximately 10 microns or less
was found to be suitable.

Flame retardant adhesive tape formulations were then
prepared as described above, containing jet milled
15 SPINFLAM MF82/PP as the P/N flame retardant, present at
the level of 75 to 100 parts. In some formulations 16
parts of TiO_2 was added.

Table 2

20 UL510 flame tests on adhesive tapes
containing SPINFLAM MF82/PP

<u>SPINFLAM</u> <u>loading</u> (parts)	<u>TiO_2</u> <u>loading</u> (parts)	<u>coating</u> <u>thickness</u> (mil) (x25.4 μm)	<u>number of</u> <u>UL510</u> <u>flame</u> <u>tests</u>	<u>results</u>
100	0	1.0	3	all pass
100	0	1.1	5	all pass
100	16	1.0	4	all pass
75	0	0.9	4	all pass
75	16	0.9	3	all pass
75	16	1.3	3	all pass

BI 001018

-13-

Example 2Adhesive tape formulations containingExolit IFR-10 as a flame retardant

Using the generalized formulation, coating and test
5 procedure of Example 1, formulations containing various
loadings of another P/N flame retardant, Exolit IFR-10
(Hoechst-Celanese), were prepared and evaluated (see
table). 16 parts TiO₂ were added to all formulations.

10

Table 3UL510 flame tests on formulations containingIFR-10 and TiO₂

loading (phr)	number of tests	results	coating thickness (mil) (x 25.4 µm)
75	3	all pass	0.6
	3	all pass	1.0
	3	all pass	1.6
70	3	all pass	0.7
	4	all pass	1.2
	4	all pass	1.8
60	3	all pass	0.9

As may be seen from Table 3, the requirements of the
15 UL510 flame test have been demonstrated for a range of
coating thicknesses at 70 and 75 parts IFR-10 loading.
Whereas SPINFLAM MF82/PP (supplied with 40 microns mean
particle size) requires jet milling before use in these
thin coatings, the Exolit IFR-10 (10 microns) was used as
20 supplied. In all cases smooth coatings were obtained
after ball milling the coating formulation in toluene for
at least 2 hours.

BI 001019

Examples 3 and 4Adhesive tape formulations containing PNA
and PNB flame retardants

Two P/N flame retardants, PNA and PNB, were
 5 evaluated in adhesive coatings at 75 parts total flame
 retardant loading, using the generalized formulation of
 Example 1. In each case the flame retardant was a blend
 of the P/N material with ammonium polyphosphate (APP,
 Phoschek P40, Durham Chemicals) in a 2:3 ratio by weight,
 10 and 16 parts of TiO₂ were added. Both PNA and PNB
 materials were jet milled to around 5 microns per
 particles size prior to formulation.

PNA is a triazine oligomer prepared as described in
 Example 3 of EP 0413613A. PNB is a polyphosphonamide
 15 prepared from phenylphosphonic dichloride and piperazine,
 as described in British Patent Application No. 9208926.7.

Table 4UL510 flame tests on formulations containing
PNA and PNB flame retardants

20

FR additive	loading (parts)	number of tests	results	coating thickness (mil) (x 25.4 μ m)
2:3 PNA + APP	75 total	3	all pass	0.7
		4	all pass	1.0
		4	all pass	1.4
		2	all pass	1.8
2:3 PNB + APP	75 total	3	all pass	0.6
		3	all pass	1.1

Thus, both these flame retardant formulations meet
 the requirements of the UL510 flame test.

BI 001020

200210 18090006

-15-

Example 5Adhesion measurements on IFR-10 formulation

Rolling ball tack adhesion tests (ASTM D3121) were performed to compare the relative adhesion of a NHIFR based adhesive tape (invention) with a brominated flame retardant based adhesive tape (comparative example). Good adhesion was obtained with both tapes (see Table 5).

The NHIFR tape contains 70 parts Exolit IFR-10 plus 16 parts TiO_2 in the adhesive (as in Example 2 above). The brominated tape contains Saytex 102 decabromodiphenyl oxide (Saytech) flame retardant (DBDPO) and antimony trioxide synergist (Anzon) in a 3:1 ratio at a combined loading of 60 parts plus 16 parts TiO_2 in the adhesive. Both tapes have an approximately 1 mil (25 μm) thick adhesive layer on PET backing.

Table 5

Rolling ball tack measurements on IFR-10
and DBDPO formulations

Flame retardant	Total flame retardant loading	Approximate roll distance (inches) (x 25.4 mm)
IFR-10	70 parts	5
DBDPO/ Sb_2O_3	60 parts	4

Example 6

Cone calorimeter evaluation of smoke
and toxicity (CO emission)

In order to assess the environmental advantages of a non-halogen adhesive tape over a halogenated formulation, smoke and carbon monoxide emissions were compared using a cone calorimeter for the two adhesive tapes from Example 5. Horizontal samples of 25 layers of tape and an

BI 001021

-16-

irradiance level of 50 kW m⁻² were employed. Test duration was 3 minutes.

Table 6

Smoke and CO Emission

Flame retardant	Smoke density (m ² /kg)		CO emission (kg/kg)	
	Peak	Mean	Peak	Mean
70 phr IFR-10	979	846	0.06	0.05
60 phr DBDPO/Sb ₂ O ₃	2224	1641	0.21	0.10

These data show a reduction of a factor of two or greater in smoke and toxic CO emission levels for the non-halogen adhesive tape formulation, when compared to the halogenated formulation.

Example 7Corrosivity testing

Simple copper mirror corrosion tests have been performed on a NHIFR adhesive tape and a halogenated formulation. The tape formulations from Example 5 were used. For each material, approximately 1 g of tape was burnt in a Stanton Redcroft FTA limiting oxygen index apparatus and the smoke sealed overnight in an FTB smoke chamber into which a copper mirror had been placed. Extensive pitting was seen on the mirror exposed to smoke from the brominated formulation, whereas no pitting was observed for the non-halogen formulation.

BI 001022

-17-

Example 8Combinations of non-halogen and
brominated flame retardants

Adhesive tapes utilizing an NHIFR material, either
5 jet milled SPINFLAM MF82/PP (MJSPP in the table), or
Exolit IFR-10, or CN1197 (Great Lakes) in combination
with Saytex 102 DBDPO (Saytech) were tested to UL510 (TiO₂
was not added).

10

Table 7Combinations of non-halogen flame retardants with DBDPO

DB/NH ratio	DBDPO (phr)	non-halogen flame retardant (phr)		Sb ₂ O ₃ (phr)	Total FR (phr)	Wet coating thickness (mil) (x 25.4 μ m)	UL510 passes/tests
4:1	48	JMSPP	12	0	60	20	1/3
						15	3/3
						11	3/3
						7	3/3
3:2	36	JMSPP	24	0	60	20	3/3
						15	3/3
						11	3/3
						7	3/3
3:2	36	CN1197	24	0	60	20	2/3
						15	3/3
						11	3/3
						7	3/3
3:2	36	IFR10	24	0	60	20	1/3
						15	2/3
						11	3/3
						7	3/3
1:1	30	JMSPP	30	0	60	20	1/3
						15	3/3

The data in the Table indicate that good performance
in this flame test is obtained over a range of adhesive
15 coating thicknesses using combinations of DBDPO with any
of these three NHIFR materials at a total flame retardant
level of 60 phr. The tendency to pass this test is

BI 001023

-18-

reduced in some cases if the adhesive wet coating thickness is increased to around 20 mil (508 μm).

The optimum performance is obtained using SPINFLAM MF82/PP with a ratio of around 3 DBDPO:2 SPINFLAM, and this particular blend demonstrates improved performance over combinations with lower or higher DBDPO:SPINFLAM ratios, and also over 3:2 blends of DBDPO with the other two NHIFRs evaluated in the Table. This particular synergistic effect was unexpected.

Example 9

Comparative Example - brominated flame retardant

An adhesive tape formulation containing DBDPO and antimony trioxide (Anzon) synergist was prepared for comparison with the DBDPO/NHIFR blends examined in Example 8 above.

Table 8

UL510 flame tests on brominated adhesive tapes

DBDPO parts	Sb ₂ O ₃ parts	Total FR (parts)	TiO ₂ parts	Coating thickness (mil) (x 25.4 μm)		UL510 passes/ tests
				wet	dry	
44.2	14.8	59	16	16	2.6	1/2
				11	1.9	1/2
				n/d*	1.5	73/83
				6	1.1	2/2
				3	0.5	3/3

*n/d = not determined

This type of brominated formulation suffers from the limitation that it has a tendency to fail the UL510 flammability test because of emission of flaming drips (see Table). The blends of DBDPO with NHIFRs examined in Example 8 above show improved performance over this comparative example.

BI 001024

Example 10Comparative example - no flame retardant added

A batch of adhesive containing no flame retardant

5 and no TiO_2 was made and coated at about 1.1 mil (28 μm)
dry adhesive thickness. On the first ignition in UL510
testing it burned for 155 seconds with flaming drips,
showing that the addition of a flame retardant is
necessary.

10

Example 11Comparative example - alumina trihydrate

A formulation containing 100 parts of SB632 alumina
trihydrate (Solem Industries) flame retardant, with no
15 TiO_2 added was prepared. Adhesive thicknesses (dry) of
0.8, 1.1 and 1.8 mil (20, 28 and 46 μm) were coated on 1
mil (25 μm) polyester. All tapes prepared had burn times
greater than 80 seconds on first and second ignition,
i.e. failed in UL510 tests.

20

Example 12Comparative example - Ceepree C-200

A batch was prepared containing 80 parts Ceepree C-
200 (ICI) (no TiO_2 added). Ceepree C-200 is ceramic
25 powder which is a mixture of glass frits, designed to
melt and form a non-combustible coating when exposed to
heat. The adhesive was coated at 20, 11, 7 and 5 mil
(508, 254, 178 and 102 μm) wet thicknesses and the
resulting tapes were tested to UL510. Each test failed,
30 usually on the first ignition.

In the following Examples 13 to 17 two different
acrylic adhesives were used.

Base Adhesive A

A copolymer of 98% isooctyl acrylate with 2% acrylic acid.

Base Adhesive B

5 A terpolymer of 93.75% isooctyl acrylate, 6% acrylic acid and 0.25% glycidyl methacrylate.

The phosphorus/nitrogen flame retardants used in the Examples were:

10 Exolit IFR-10 commercially available from Hoechst Celanese.

Poly(allylammonium) pyrophosphate (PAP).

(Example 1 of British Patent Application No. 9223792.4).

15 A comparative composition containing halogenated flame retardants with the flame retardant additive consisting of a total of 60 parts by weight, with respect to 100 parts acrylic adhesive, of a mixture of decabromodiphenyl oxide, antimony trioxide and titanium dioxide in the proportions 25:7:25 was used. This
20 halogenated flame retardant mixture which is in accordance with U.S. 4,061,826 is referred to as DB.

Adhesive compositions were coated out onto the polyester backing by means of knife edge coating from a solvent consisting of 227.1 parts ethyl acetate and 177.2
25 parts n-hexane, with respect of 100 parts of Base Adhesive A or B.

Non-halogen adhesive compositions consisted of 100 parts Base Adhesive A or B with between 0 and 100 parts of phosphorus/nitrogen flame retardants and no other
30 additives.

All formulations were ball milled for at least two hours to ensure good dispersion and then knife edge coated onto 1.2 mil (30 µm) thick PET. Wet coating thicknesses of 10 mil (250 µm) were employed, giving a

202210 0123006

-2:-

final adhesive layer thickness of approximately 1 mil (25 μ m).

After drying, samples were cut into 3/4 inch (1.9 cm) wide strips and wrapped onto steel rods for UL510 flammability testing.

Example 13

Adhesive formulations containing Exolit IFR-10 as the flame retardant additive.

Formulations were prepared containing 60 parts Exolit IFR-10 as the flame retardant additive in 100 parts Base Adhesive B. Mixing, coating and evaluation were performed as described above. UL510 flammability test results were as follows:

<u>Number of tests performed</u>	<u>Results</u>
3	All pass

Hence this formulation has been demonstrated to meet the requirements of the UL510 flammability test.

Example 14

Adhesive formulations containing Exolit IFR-23 as the flame retardant additive.

Formulations were prepared containing 60 parts Exolit IFR-23 as the flame retardant additive in 100 parts Base Adhesive A using the same methods as in Example 13. UL510 flammability test results were as follows:

<u>Number of tests performed</u>	<u>Results</u>
3	All pass

Hence this formulation has been demonstrated to meet the requirements of the UL510 flammability test.

BI 001027

-22-

Example 15

Adhesive formulations containing PAP as the flame retardant additive.

Formulations were prepared containing 50 parts PAP as the flame retardant in Base Adhesive B using the same methods as in Example 13. UL510 flammability test results were as follows:

<u>Number of tests performed</u>	<u>Results</u>
3	All pass

Hence this formulation has been demonstrated to meet the requirements of the UL510 flammability test.

Example 16

Adhesion testing of Exolit IFR-10 formulation.

Adhesion measurements were performed by means of the rolling tube tack test for a tape sample containing 100 parts base Adhesive A with 60 parts Exolit IFR-10 as the flame retardant adhesive and also for a tape sample containing 100 parts Base Adhesive A with 57 parts halogenated flame retardant additives as described above as a comparison. Both samples comprised an additional thin layer (approximately 5 μ m) of Spray Mount™ adhesive.

Test sample	Additive loading/ parts	Approximate roll distance (inches)
Base adhesive A/IFR-10	60	6.5
Base adhesive B/DB	57	4.0

Hence the adhesive properties of the 100 parts Base Adhesive A/60 parts of Exolit IFR-10 formulation are comparable to that of the halogenated composition. The adhesion of the comparative halogenated composition is

BI 001028

-23-

considerably in excess of that required to meet rolling ball tack tests such as ASTM D3121.

Example 17

5 Adhesive performance of top coated specimens versus non-top coated specimens.

Adhesion measurements, according to the rolling tube tack test, were performed for a specimen of 100 parts Base Adhesive A containing 60 parts IFR-10 with and
10 without a top coat layer of non-flame retardant adhesive, Spray Mount™ adhesive, commercially available from Minnesota Mining and Manufacturing Company. The results were as follows:

Test specimen	Approximate roll distance (inches)
top coat	6.5
no top coat	> 20

15 The addition of a thin top coat layer (approximately 5 microns) of non-flame retardant, pressure-sensitive adhesive considerably improves the tackiness of the composition.

Example 18

20 UL510 flammability performance of top coated specimens versus non-top coated specimens.

The tape samples of Example 17 were subjected to UL510 flammability testing and the results were as
25 follows:

Test specimen	Number of tests	Classification
no top coat	3	all pass
top coat	3	all pass

BI 001029

Thus, the top coat layer has minimal effect upon flammability performance.

Example 19

Smoke and toxicity performance of halogenated and non-halogenated compositions.

Adhesive tape materials as described in Example 18 were evaluated on a cone calorimeter at an external irradiant flux of 50 kW m^{-2} . Smoke performance was evaluated by means of determination of the average specific extinction are (SEA, in $\text{m}^2 \text{ kg}^{-1}$). Toxicity performance was assessed by means of the average yield of carbon monoxide (CO, in kg per kg of sample burned) during the test. These data are as follows:

Flame retardant	Smoke average SEA/ $\text{m}^2 \text{ kg}^{-1}$	Toxicity average CO/kg kg^{-1}
Exolit IFR-10	271	0.033
DB	724	0.135

Hence the non-halogen material displays much lower smoke and carbon monoxide production than the halogenated equivalent.

In Examples 20-23 all samples were based on an acrylic adhesive foam, of the type described in, for example, U.S. 4,223,067 and comprising:

94.5/5.5 Isooctylacrylate/acrylic acid
copolymer (total 100 parts)

6 parts Glass microspheres

0.30 parts Irgacure 651 (Ciba Geigy)

0.10 parts Hexanediol diacrylate

Flame retardant additives were incorporated into samples of this composition as disclosed hereinafter and tapes were prepared by coating approximately 1 mm thick

-25-

between two poly(ethylene terephthalate) PET release liners and UV curing at 1.5 mW cm^{-2} average intensity.

Principal evaluations were conducted using the cone calorimeter. Materials were evaluated using an external
5 irradiant flux of 50 kW m^{-2} . It was found to be very difficult to remove both PET release liners from the specimen and avoid disintegration so as a matter of course samples were tested with one PET layer still in place, this forming the lower (unexposed) surface.
10 Materials were generally tested in duplicate or triplicate, dependent upon the repeatability of the first two runs. In all cases results are quoted as mean values for the runs undertaken.

Foam tapes were prepared using the above adhesive
15 and the flame retardant indicated below:

- a) Control
no flame retardant phosphorus/nitrogen containing materials.
- b) 30% PAP:P-40
20 4:1 blend of PAP (polyallylammonium pyrophosphate) (titanate surface treated with Kenrich KR 38 S commercially available from Kenrich Petrochemicals Inc.) with ultra fine grade ammonium polyphosphate (Phoschek P-40 commercially available from Durham Chemicals).
- c) 30% IFR-10
25 a flame retardant commercially available from Hoechst Celanese under the trade name EXOLIT IFR-10.
- d) 30% IFR-23
a flame retardant commercially available from
30 Hoechst Celanese under the trade name EXOLIT IFR-23.
- e) 30% DB:ATO
30% decabromodiphenyl oxide:antimony trioxide [3:1]

90006087 "012300"

BI 001031

-26-

f) 30% ATH
30% alumina trihydrate (Lonza Martinal CL-107C,
stearic acid treated).

The following tape material was also tested:

5 g) 3071 FR

Avery Dennison Fastape 3071 acrylic tape. This
material was examined as a 14 layer laminate of thickness
approximately 1 mm to correspond with the other
specimens.

10

Example 20

UL94 Tests

15 UL94 tests were conducted on materials a) to f) as
described above. For the control, not only did the drips
ignite the gauze, but the flame continued to travel up
the specimen (past the five inches mark). All samples
containing flame retardants extinguished before the five
inches mark.

20

Example 21

Cone Calorimeter Performance

Cone calorimeter tests were conducted on materials
a) to g) and data for each of the materials is reported
in the following Table.

25

202310 18090002

BI 001032

-27-

Table

Material	RHR peak	RHR average	SEA average	CO average
Control	495	133	481	3.43
3071 FR	297	95	998	11.00
30% DB:ATO	187	87	1145	15.34
30% PAP:P-40	192	114	702	4.01
30% IFR-10	233	91	473	3.21
30% IFR-23	220	83	504	2.60
30% ATH	389	134	390	3.61

RHR peak = peak rate of heat release (kW m^{-2})

RHR average = average rate of heat release (kW m^{-2})

5 SEA average = average specific extinction area ($\text{m}^2 \text{kg}^{-1}$)

CO average = average yield of carbon monoxide (cg g^{-1})

In all cases average values are quoted over the range from ignition to ignition plus 3 minutes.

10 Rate of Heat Release

Rate of heat release data has been plotted in Figures 1 and 2. Figure 1 shows comparative data for each of the phosphorus/nitrogen materials alongside the 3071 FR material. Figure 2 shows the comparison between 15 PAP:P-40 and 3071 FR with greater clarity.

These Figures illustrate that the three phosphorus/nitrogen flame retardants all show improved rate of heat release performance over the halogenated 3071 FR material. Of these, PAP:P-40 exhibits the best 20 performance because, although it shows higher heat release during most of the test than the Exolit IFR materials, its peak RHR is lower and the time to peak RHR is longer. Both of these factors are advantageous in a

BI 001033

202210 28090006

-28-

real fire scenario, as they will decrease the flashover speed.

Similar comments can be applied to the comparison between PAP:P-40 and DB:ATO, as although the P/N compound shows higher heat release at longer time, the peak RHR and time to peak RHR values for the two materials are virtually identical, so their real fire performances would be expected to be comparable. The strength of the P/N materials is of course that this good rate of heat release performance is allied to excellent smoke and toxicity characteristics, as discussed below.

Specific Extinction Area

Specific extinction area data is illustrated in Figures 3 and 4. Figure 3 shows plots for all the materials evaluated with the exception of ATH. Figure 4 compares the behavior of PAP:P-40 with that of 3071 FR. It is evident that all of the P/N additives show much better performance as regards smoke propensity than their halogenated counterparts, with Exolit IFR-10 exhibiting marginally the best performance. While the P/N additives are all higher smoke materials than ATH at this loading, ATH is a very poor performer in terms of rate of heat release. The key advantage of P/N materials is that they show desirable properties in all fire characteristics.

Carbon Monoxide

Figure 5 shows plots for all materials with the exception of ATH; Figure 6 providing a comparison between PAP:P-40 and 3071 FR. The halogenated materials, either containing DB:ATO or 3071 FR, both produce very high yields of carbon monoxide throughout the test. This compares with the very low yields of carbon monoxide generated by the phosphorus/nitrogen intumescent type flame retardants. Although there are a multiplicity of toxic species in the cocktail of combustion products that

20E210" 28090006

BI 001034

-29-

arise from any fire, carbon monoxide is invariably of most importance due to its presence in large amounts and human inability to detect it by means of odor, irritation, etc.

- 5 The overall results demonstrate the great utility of phosphorus/nitrogen flame retardants, in that they provide a route to low heat release materials, comparable in this respect with halogenated additives, while showing excellent smoke and carbon monoxide performance,
10 comparable to inorganic additives, such as, alumina trihydrate.

Example 22

Adhesive Tack Performance of Acrylic Foams

- 15 Adhesive tack measurements were performed by means of the rolling tube tack test. A clean tube was released onto the foam surface from a set distance at a set height and the distance covered by the tube before coming to rest was measured as described above. Specimens consisted of strips of width 1 inch (2.54 cm), securely
20 fastened to the bench surface. Rolling tube results are listed.

Adhesive Tack Performance of Acrylic Foams

Material	Number of tests	Average roll distance/mm
Control	5	19
30% PAP:P-40	4	17
30% IFR-10	4	21
30% DB:ATO [3:1]	4	43

- 25 The results demonstrate the phosphorus/nitrogen flame retardant additives do not seriously detract from the adhesive tack of the composition, with the PAP:P-40 additive actually improving the tack. Furthermore, the

BI 001035

202210 28090006

-30-

phosphorus/nitrogen additives show considerably improved adhesive tack test performance over the halogenated flame retardant composition.

5

Example 23Peel Adhesion and Static Shear Performance

Four tests were performed on a variety of specimens:

- a) 90° peel adhesion, 20 minute dwell;
- b) 90° peel adhesion, 72 hour dwell;
- 10 c) static shear, 1 inch x 1/2 inch (2.54 cm x 1.27 cm), 1 kg, room temperature; and
- d) static shear, 1 inch x 1/2 inch (2.54 cm x 1.27 cm), 500 g, 70°C.

Test methods were as follows:

15

Peel adhesion

- A 0.5 inch (1.27 cm) wide strip of foam tape was applied to a clean 2 inch x 6 inch (5.1 cm x 15.2 cm) stainless steel panel and rolled down with a 4.5 lb. (2.04 kg) roller. The liner was removed and a 0.005 inch (0.13 mm) thick anodized aluminum foil strip applied as above. The sample was then housed in a constant temperature and humidity environment for 24 hours prior to testing. A loop was formed from the aluminum strip (stapled together) from which the specified weight was hung (either 1 kg or 500 g). The time to failure was recorded or until 10,000 minutes was reached.

25

Tape samples were prepared from the adhesive formulation described above with the flame retardants and amounts reported in the following Table:

30

202210 18090006

BI 001036

-31-

Sample	Flame Retardant	Loading %
(i)	None	-
(ii)	DBDPO:ATO (3:1)	19
(iii)	DBDPO:ATO (3:1)	30
(iv)	DBDPO:ATO:ATH (2:1:1)	20
(v)	IFR-10	30
(vi)	IFR-10	40
(vii)	IFR-10	50
(viii)	ATH	30
(ix)	ATH	40
(x)	ATH	50

The peel adhesion and static shear results are reported in the following Table:

Sample	Test (a)	Test (b)	Test (c)	Test (d)
(i)	66	110	10,000+	10,000+
(ii)	92	121	10,000+	10,000+
(iii)	not tested	40	10,000+	10,000+
(iv)	55	200	10,000+	10,000+
(v)	62	97	10,000+	10,000+
(vi)	62	99	10,000+	10,000+
(vii)	48	114	10,000+	10,000+
(viii)	43	93	10,000+	10,000+
(ix)	42	69	10,000+	10,000+
(x)	18	35	10,000+	10,000+

- 5 The data demonstrate that acrylic foams containing a P/N flame retardant such as Exolit IFR-10 show excellent adhesion performance, even at high loadings. Peel adhesion performance is considerably better for the P/N flame retardant than for either the halogenated flame
- 10 retardant or ATH. Static shear results are good for all materials.

BI 001037

202210 18090006

In the following Examples 24-26, tackified acrylic pressure sensitive adhesives were investigated in the presence and absence of a variety of NHIFR materials. The following tackified adhesives were employed:

- 5 Adhesive (C): a copolymer of 2-ethylhexyl acrylate (95.5 parts by wt) and acrylic acid (4.5 parts by wt) was prepared as a solution of 25 wt% solids in a mixture of isopropanol and heptane (70:30 by weight). To 76.1 parts by wt of this solution was added 23.9 parts by wt of a solution comprising Foral 85 (46.96 wt%), heptane (30.43 wt%) and toluene (22.61 wt%). (Foral 85 is a hydrogenated rosin ester tackifier supplied by Hercules).

- 10 Adhesive (D): Vantac V338j (a water borne acrylic resin, tackified with a rosin derivative) was used as supplied by the manufacturer, Rhone Poulenc.

The following NHIFR materials were added to adhesives (C) and (D) in varying amounts in the range 20-50 phr (parts by wt per hundred parts resin):

- 15 Hostaflam AP462 (supplied by Hoechst Celanese) (added either alone or in combination with lesser amounts of Hostaflam RP614, comprising microencapsulated red phosphorus, also supplied by Hoechst Celanese);
- 20 CP Flam/F (supplied by Nordmann, Rassmann GmbH & Co.); and Phos Check P40 (supplied by Monsanto).

- 25 In the case of Adhesive (C), the flame retardants were dispersed in the adhesive solution with high-speed stirring (1500-2000 rpm) and the mixture diluted with heptane (about 30 ml per 130 g adhesive) prior to knife coating on a release liner (silicone treated paper). The coatings were dried for 10 min at ambient temperature, then for 10 min at 70°C. Dry layer thicknesses in the range 70-100 μ m were obtained.

- 30 In the case of Adhesive (D), the flame retardants were predispersed in water (about 30 ml per 130 g

202210 18090006

-33-

adhesive) and the adhesive added with slow-speed stirring to avoid foaming. After stirring for 1 day, the mixture was knife coated on siliconised paper as before, and dried for 10 min at 100°C.

- 5 For testing, samples of the coatings were cut to the desired size, the adhesive was laminated to the desired substrate, and the release liner removed. Thereafter, a second substrate was laminated to the exposed adhesive surface.

10

Example 24

- The Vertical Burn Test (in accordance with FAR 25.853) was performed on samples of polyethylene foam (2mm thickness) laminated to aluminium foil (25 µm thickness), using adhesives (C) and (D) with and without added NHIFR materials, giving the results tabulated below. For samples subjected to 12 sec flame exposure, "after flame time" refers to the time taken to self-extinguish after removal of the Bunsen flame. All samples subjected to 60 sec flame exposure self-extinguished within that time, and "S/E time" refers to the time taken to self-extinguish from initial application of the Bunsen flame. "Burn length" refers to the length of the sample consumed. All samples measured 300x70 mm initially.
- 15
- 20
- 25

20E2T0" 28090006

BI 001039

-34-

Adhesive	FR Material	FR concn (phr)	Flame Exp. Time (sec)	Burn Length (mm)	After Flame Time (sec)	S/E Time (sec)
C	-	-	12	184	36	-
C	-	-	60	205	-	30
C	AP462	20	12	166	3	-
C	AP462	40	12	155	1	-
C	AP462	40	60	169	-	23
C	AP462 + RP614	20 + 2	60	179.5	-	25.5
C	CP Flam/F	30	12	169	4	-
C	CP Flam/F	30	60	197	-	25
C	CP Flam/F	50	12	171	2	-
C	CP Flam/F	50	60	169	-	17
C	P-40	30	12	165	5	-
C	P-40	30	60	177	-	29
C	P-40	50	12	154	4	-
C	P-40	50	60	190	-	28
D	-	-	12	169	24	-
D	-	-	60	228	-	30
D	AP462	30	12	154	2	-
D	AP462	30	60	206	-	26
D	AP462	50	60	189	-	24.5
D	CP Flam/F	40	12	169	3	-
D	CP Flam/F	40	60	215	-	25
D	P-40	30	12	174	2	-
D	P-40	30	60	193	-	25
D	P-40	50	12	153	2	-
D	P-40	50	60	177	-	23

The results show that even at relatively low loadings (20 -30 phr), a significant improvement in flame retardant properties is provided by the NHIFR materials.

5

Example 25

This example demonstrates the good adhesive properties of flame retardant pressure sensitive adhesives in accordance with the invention. Samples of adhesives (with and without added NHIFR materials) were applied as strips one inch (2.54 cm) wide on a cleaned aluminium panel, then a strip of Nomex textile material of the same width was laminated on top of the adhesive. (Nomex textile material is used as a wall covering in

BI 001040

-35-

aircraft cabins and is supplied by Moebelstoffe Langenthal AG). After conditioning for 10 minutes at 70°C and 3 days at room temperature, the 90 peel force was measured for a peel rate of 100 mm/min, giving the results tabulated below.

Adhesive	FR Material	FR Conc'n. (phr)	Peel Force (N/inch)
C	-	-	9.95
C	AP462	30	5.76
C	AP462	50	5.67
C	AP462 + RP614	20 + 2	10.66
C	CP Flam/F	40	11.1
C	P-40	30	7.0
C	P-40	50	8.4
D	-	-	9.12
D	AP462	30	9.26
D	AP462	50	7.62
D	CP Flam/F	40	9.30
D	P-40	30	7.59
D	P-40	50	7.86

In most cases, the peel force was little affected by the addition of the NHIFR material, and in some cases was actually increased.

In a further test of adhesive properties, the flame retarded pressure sensitive adhesive compositions listed above were applied to one-inch wide strips of polyethylene foam of 10 mm thickness, which were then laminated to an aluminium panel. After conditioning for 3 days at ambient temperature, the strips were peeled manually. In all cases, this caused splitting of the foam, with the adhesive interface remaining intact.

As an extension of this test, identical adhesive-coated foam strips were wrapped round an aluminium pipe of 250 mm external diameter and stored at 85°C for 3 days. This tested the ability of the adhesive bond to resist the peeling force exerted by the natural resilience of the foam, any tendency for failure being evidenced by

BI 001041

-36-

lifting of the edges of the foam strip. The combination of Adhesive (D) and AP462 (at both 30 and 50 phr) failed this test, but all others passed, with a maximum of 5 mm of edge lifting observed.

5

Example 26

This example demonstrates the intumescent properties of the flame retardants used in the two previous examples. Successive layers of an adhesive composition to be tested were transferred from siliconised release liner to a glass slide until a thickness of about 0.5-1.0 mm was built up. The exact thickness was measured before transfer to a cold oven which was then set to 350°C. After one hour, the thickness of the resulting charred layer was measured, and this figure divided by the initial thickness gave the degree of intumescence. As shown in the following table, all three materials caused a significant degree of expansion.

10

15

20

Adhesive	FR Material	FR Concn (phr)	Initial Thickness (mm)	Char Thickness (mm)	Intumescence (times)
C	AP462	50	0.8	5.9	7.4
D	CP Flam/F	40	0.4	3.1	7.5
C	P-40	50	0.7	3.1	4.4

202210/28090006

BI 001042

CLAIMS

1. A pressure-sensitive adhesive composition comprising an adhesive selected from the group consisting
5 of rubber resin adhesives and acrylic adhesives containing from about 10 to about 60% by weight of the adhesive of a non-halogen intumescent flame retardant.

2. A pressure-sensitive adhesive composition
10 according to claim 1 which comprises a rubber elastomer selected from crude natural rubber, styrene-butadiene, polybutadiene, polyisobutylene and polysiloxane.

3. A pressure-sensitive adhesive composition
15 according to claim 2 which additionally comprises from 40 to 150 parts tackifying resin by weight per 100 parts by weight of rubber elastomer, said tackifying resin being selected from the group consisting of glyceryl esters of hydrogenated resin, thermoplastic terpene resins,
20 petroleum hydrocarbon resins, coumarone-indene resins, synthetic phenol resins, polybutenes and silicone resins.

4. A pressure-sensitive adhesive composition
25 according to claim 1 in which the acrylic adhesive is selected from the group consisting of homopolymers and copolymers of acrylic acid, methacrylic acid, isooctyl acrylate, acrylamide, methacrylamide, acrylonitrile, methacrylonitrile, methyl isoamyl acrylate and 2-ethyl hexylacrylate.

30 5. A pressure-sensitive adhesive composition according to claim 1 in which the flame retardant additive is selected from the group consisting of a nitrogen containing oligomer and ammonium polyphosphate.

-38-

6. A pressure-sensitive adhesive composition according to claim 5 in which the flame retardant additive additionally comprises melamine cyanurate and a hydroxyalkyl derivative of isocyanuric acid, at least partially in the form of a homopolymer.

7. A pressure-sensitive adhesive composition according to claim 6 wherein said flame retardant additive comprises a phosphorus containing oligomer having a triazine nucleus.

8. A pressure-sensitive adhesive composition according to claim 7 wherein said the flame retardant additive comprises a polyphosphonamide containing oligomer having a triazine nucleus.

9. A pressure-sensitive adhesive composition according to claim 1 wherein said flame retardant additive comprises a polymeric salt containing both phosphorus and nitrogen.

10. A pressure-sensitive adhesive composition according to claim 1 wherein said non-halogen intumescent flame retardant comprises a phosphate salt of a polyol.

11. A pressure-sensitive adhesive composition according to claim 1 further comprising an additional flame retardant.

12. A pressure-sensitive adhesive composition according to claim 11 in which said further flame retardant is a halogenated polynuclear aromatic ether.

90006087 012302

BI 001044

-39-

13. A pressure-sensitive adhesive composition according to claim 12 in which said further flame retardant is decabromodiphenyl oxide, said retardant being present in an amount of 30 to 50% by weight of the
5 adhesive.

14. A pressure-sensitive adhesive tape comprising a backing bearing a layer of pressure-sensitive adhesive according to claim 1, said adhesive layer having a
10 thickness of up to 5 mm.

15. A pressure-sensitive adhesive tape according to claim 14 which additionally comprise an outer layer of pressure-sensitive adhesive having a thickness of less
15 than 125 μm .

16. A pressure-sensitive adhesive tape according to claim 15 in which the backing is selected from glass cloth, polyethylene terephthalate, polyimide and
20 polyolefin.

208210" 28090006

BI 001045

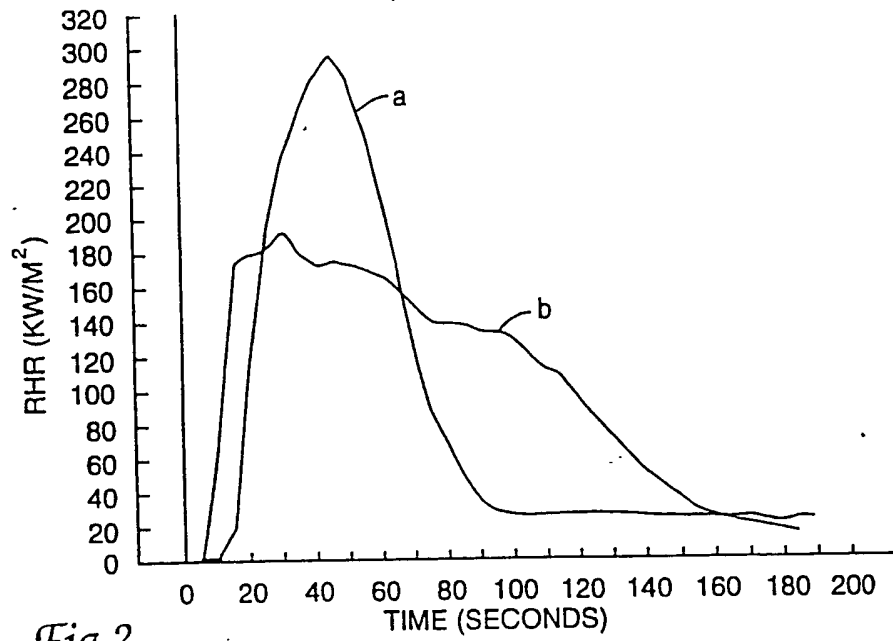


Fig.2

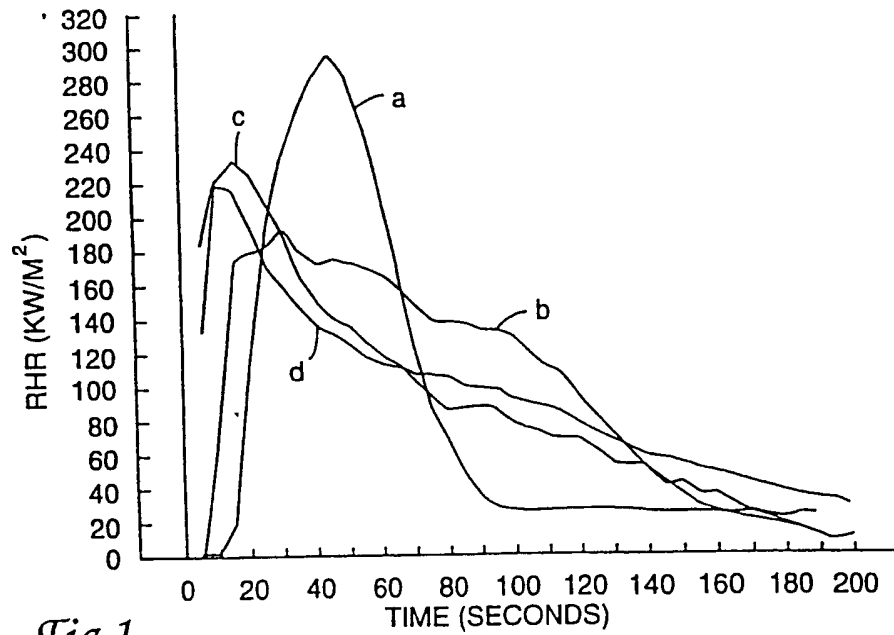


Fig.1

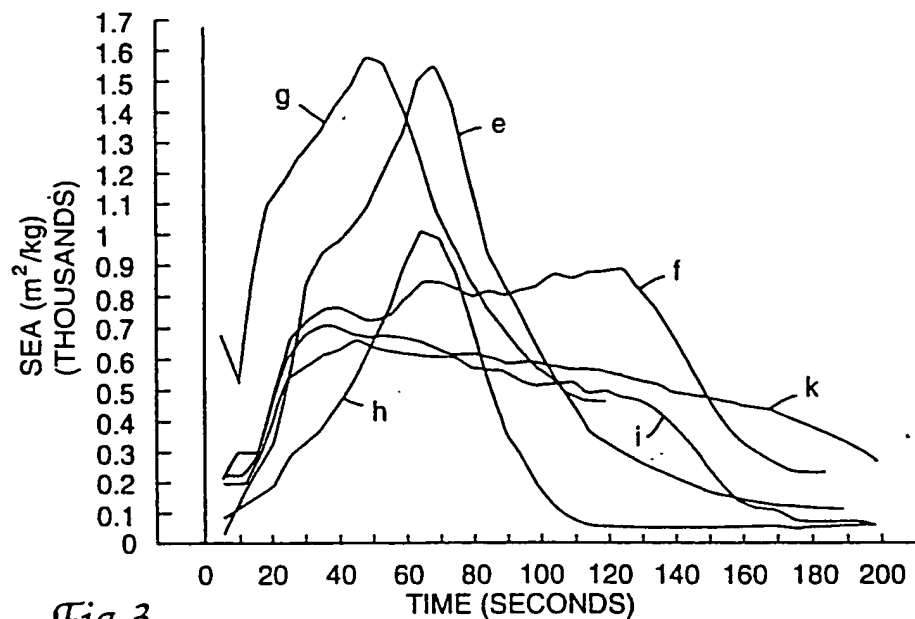


Fig.3

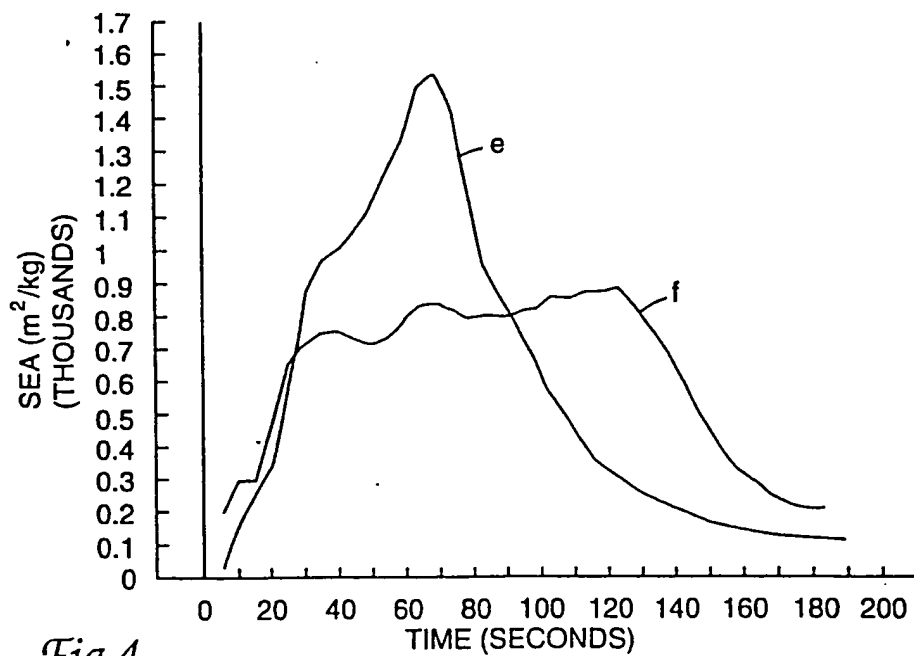


Fig.4

3/3

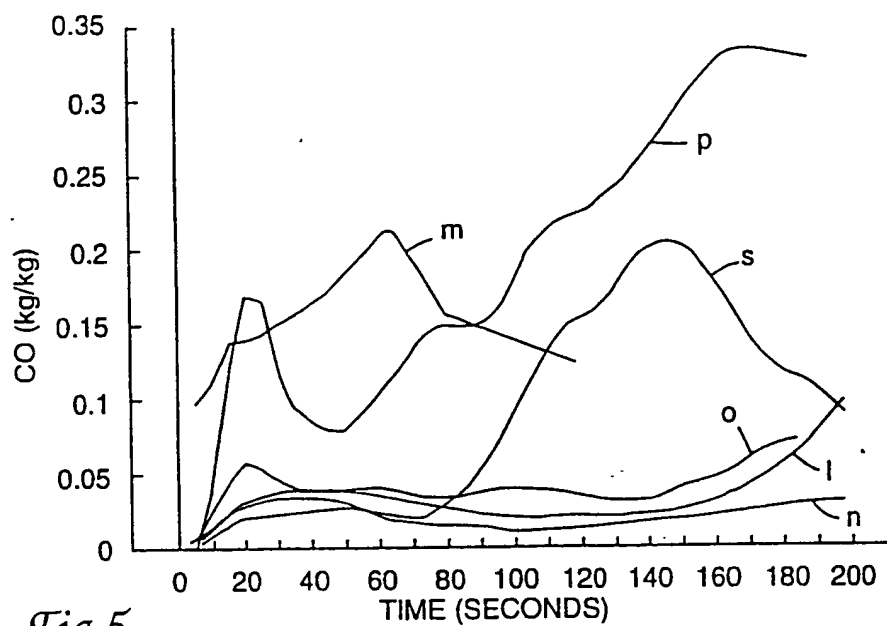


Fig. 5

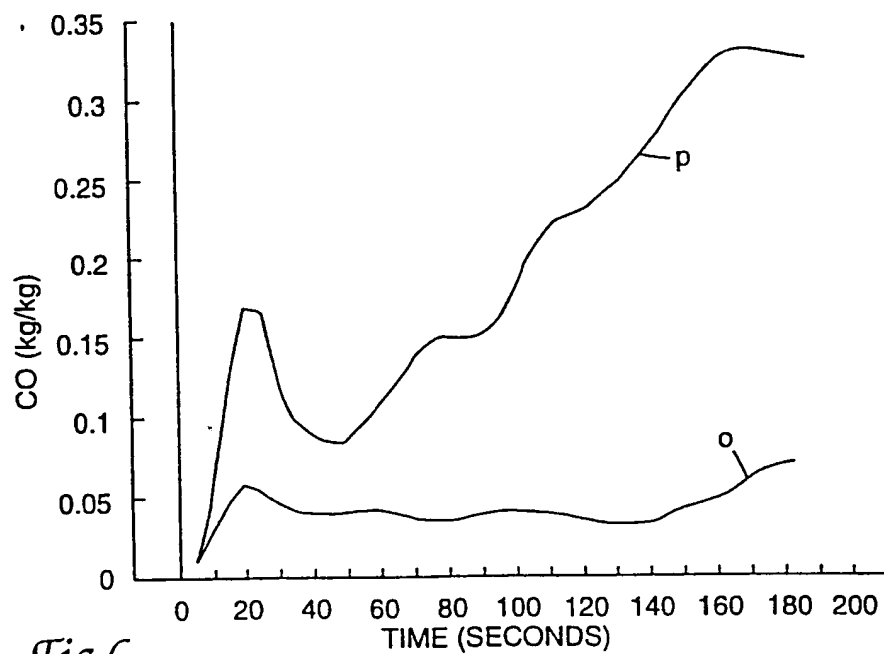


Fig. 6

BI 001048

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US 95/06388

A. CLASSIFICATION OF SUBJECT MATTER

IPC6: C09J 7/02, C09J 11/00, C08K 5/5399

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: C09J, C08K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

REGISTRY FILE, CAPLUS, WPI, CLAIMS, EPODOC

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	GB, A, 2272444 (MINNESOTA MINING AND MANUFACTURING COMPANY), 18 May 1994 (18.05.94), abstract, page 10, line 21-line 37, claims --	1-16
Y	US, A, 5286775 (PRADIP K. BANDYOPADHYAY), 15 February 1994 (15.02.94), abstract, column 4, lines 35-60, column 5, lines 30-46, examples 1, 2, claims --	1-16
Y	US, A, 4061826 (RAYMOND J. PETRAS ET AL), 6 December 1977 (06.12.77), column 2, line 61 - column 3, line 30, column 4, line 9 - line 27 --	1-16

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

A document defining the general state of the art which is not considered to be of particular relevance

E earlier document but published on or after the international filing date

L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

O document referring to an oral disclosure, use, exhibition or other means

P document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

& document member of the same patent family

Date of the actual completion of the international search

13 Sept 1995

Date of mailing of the international search report

22. 09. 95

Name and mailing address of the International Searching Authority



European Patent Office, P.B. 5818 Patenlaan 2
NL-2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl.
Fax: (+31-70) 340-3016

Authorized officer

Sofia Nikolopoulou

Form PCT/ISA/210 (second sheet) (July 1992)

BI 001049

202270 78090006

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US 95/06388

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO, A1, 9322373 (MINNESOTA MINING AND MANUFACTURING COMPANY), 11 November 1993 (11.11.93) --	1-16
A	Dialog Information Services, file 351, DERWENT WPI, Dialog accession no. 009760258, WPI accession no. 94-040109/05, NIPPON PETROCHEMICALS CO LTD: "Flame-retardant pressure sensitive adhesive tape - obtd. by coating base material prepd. by calendering polyolefin resin compsn. with adhesive, suitable for insulating tape", &JP 5345881, A, 931227, 9405 (Basic) -- -----	1-16

Form PCT/ISA/210 (continuation of second sheet) (July 1992)

BI 001050

202210/28090006

INTERNATIONAL SEARCH REPORT

Information on patent family members

SA '11256

International application No.

25/08/95

PCT/US 95/06388

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
GB-A-	2272444	18/05/94	CA-A-	2146558	26/05/94
			EP-A-	0668887	30/08/95
			WO-A-	9411425	26/05/94
US-A-	5286775	15/02/94	WO-A-	9414852	07/07/94
US-A-	4061826	06/12/77	NONE		
WO-A1-	9322373	11/11/93	NONE		

Form PCT/ISA/210 (patent family annex) (July 1992)

BI 001051

20220728090006

